




ELMARCO
GOOD FORM FOR LIGHTING

ELMARCO Technika Świetlna Sp. z o.o. Sp. K.
Ul. Krzemowa 7, 81-577 Gdynia,
tel. (58) 552 84 27

Garden Lamp BOLUX 1,2

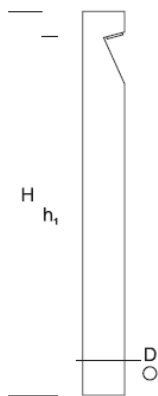

PRODUCT DESCRIPTION

Cylindrical aluminum column with a characteristic oblique undercut allows to fix the LED light source at an angle illuminating paths or create other accents in gardens, public spaces.

HEIGHT: 1,2 m

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 8,5 W/1050 lm
Lifetime	80.000 h LB 80/20
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP66
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	FBO-50/7,5
Column/body material	Aluminium
Lampshade	-
Metal color	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> White 9003 <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px; margin-top: 5px;"></div> Grey 7043 <div style="width: 20px; height: 20px; background-color: #404040; margin-right: 5px; margin-top: 5px;"></div> Graphite 7016 <div style="width: 20px; height: 20px; background-color: #202020; margin-right: 5px; margin-top: 5px;"></div> Black 9005 <div style="border: 1px solid black; padding: 2px; margin-top: 5px; margin-left: 10px;">RAL*</div> </div>

ON ORDER



** on special order

DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h ₁	D	W	lm	lm / W	W	lm	lm / W	
172-0024-000192	BOLUX LO 1,2	120/113	13,3	6,5	1240	190	8,5	1050	124	FBO-50/7,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.