





Park Lantern BOLARD M 3,0

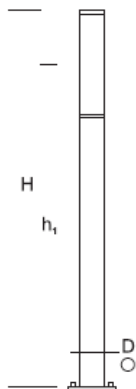

OPTICS



„S”

DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h ₁ /h ₂	D	W	lm	lm / W	W	lm	lm / W	
190-1111-300029	BOLARD M LP 3,0	300/260	-/13,3	41,5	6500	155	45	5400	120	FBK-90/18

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

The modern simple form of the luminaire is built with an aluminum body, attached to the foundation. The upper part is an optical chamber with an LED source and a frosted PMMA diffuser, which eliminates glare. Designed for: illumination of public spaces, parks, etc.

HEIGHT: 3 m

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: integrated 45 W/5400 lm
Lifetime	70.000 h LB 80/20
Optics	S
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	FBK-90/18
Column/body material	Aluminium
Lampshade	PMMA
Metal color	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> White 9003 <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px; margin-top: 5px;"></div> Grey 7043 <div style="width: 20px; height: 20px; background-color: #404040; margin-right: 5px; margin-top: 5px;"></div> Graphite 7016 <div style="width: 20px; height: 20px; background-color: #202020; margin-right: 5px; margin-top: 5px;"></div> Black 9005 <div style="margin-left: 10px; border: 1px solid black; padding: 2px;">RAL*</div> </div>

ON ORDER



** on special order