
# Park Lantern BOVER K 3,0 COB



**OPTICS** 





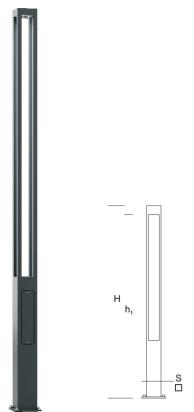















## PRODUCT DESCRIPTION

Modern LED lantern with a square cross-section. Its column is made of aluminium profiles joined together. The lower part of LP (in the bay) contains a fuse plate and power supply unit. In the upper part, the accessories chamber is closed by a plate with a sealed LED module (with the lens) mounted from the outside and a heat-sink - from the inside. Optionally, an IP 54 plug socket can be mounted.

HEIGHT: 3 m

### **TECHNICAL SPECIFICATIONS**

Voltage	230 V
Source power / fixture	Recommended: Integrated 26 W/3120 lm
Lifetime	70.000 h LB 80/20
Optics	S
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes
*	

<sup>\*</sup>choice

### **MECHANICAL DATA**

Foundation	FBK-90/18	
Column/body material	Aluminium	
Lightshade	PMMA	
Metal color		White 9003
		Grey 7043
		Graphite 7016
		Black 9005
	RAL*	

# **ON ORDER**







<sup>\*\*</sup>on special order

# **DETAILED DESCRIPTION**

INDEX NAZWA NAME	NAZWA	WYMIARY/DIN	'MIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATŁA / SOURCE OF LIGHT		OPRAWA / FIXTURE			FUNDAMENT
	NAME	H/h,/h₂	S	W	lm	lm / W	W	lm	lm / W	FOUNDATION
190-1111-300008	BOVER K LP 3,0 COB	300/295	15x15	23,5	4070	173	26	3120	120	FBK-90/18

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.

