


## Park Lantern BOVER K 4,0 AS



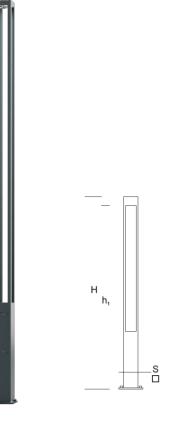

## **PRODUCT DESCRIPTION**

Modern LED lantern with a square cross-section. Its column is made of aluminium profiles joined together. The lower part of LP (in the bay) contains a fuse plate and power supply unit. In the upper part, the accessories chamber is closed by a plate with a sealed LED module (with the lens) mounted from the outside and a heat-sink - from the inside. Optionally, an IP 54 plug socket can be mounted.

HEIGHT: 4 m

## **TECHNICAL SPECIFICATIONS**

Voltage	230 V							
Source power / fixture	Recommended: Integrated 36 W/3600 lm							
Lifetime	70.000 h LB 80/20							
Optics	AS							
Ambient temperature	-30 ÷ +45							
Light color	4000 3000 *							
Ingress Protection	IP65							
Protection class								
CE	Yes							
*choice								
MECHANICAL DATA								
Foundation	FBK-90/18							
Column/body material	Aluminium							
Lightshade	РММА							
Metal color	White 9003							
	Grey 7043							
	Graphite 7016							
	Black 9005							
	RAL*							
ON ORDER								
2700°K 200 mA	ф.							

 $\odot$ 







## DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT
		H/h,/h₂	S	W	Im	lm / W	W	lm	lm / W	FOUNDATION
190-1111-400016	BOVER K LP 4,0 AS	400/395	15x15	32	4930	154	36	3600	100	FBK-90/18

DIM

5000°K

\*\* on special order

1050 mA

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.

