

Fixture CHANTAL M 32







DETAILED DESCRIPTION

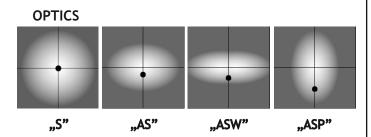















PRODUCT DESCRIPTION

Classic fixture to be arm-mounted, ř60 mm at a height of 5-7 m. Aluminum body forms a sealed chamber (closed with a plate) with a sealed LED module (with the lens) mounted from the lampshade's side and a heat-sink and power supply unit - from the inside. The chamber is connected to the upper rosette, which - apart from its decorative function, also serves as a mounting bracket. Lamp-shade made of polycarbonate (PC) or polymethacrylate (PMMA), transparent or 'frozen' texture.


TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 32 W/36 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II*
CE	Yes

^{*}choice

MECHANICAL DATA

Foundation Column/body material Aluminium Lampshade **PMMA** White 9003 Metal color Grey 7043 Graphite 7016 Black 9005 RAL* **ON ORDER**



^{**}on special order

INDEX	NAZWA NAME	DIMENSIONS [cm]	SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	Im / W	W	lm	lm / W	m²	kg
195-1111-000057	CHANTAL M 32	56/56/50	32	4900	154	36	3460	96	0,12	5,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.

