



## Fixture CHANTAL S 32

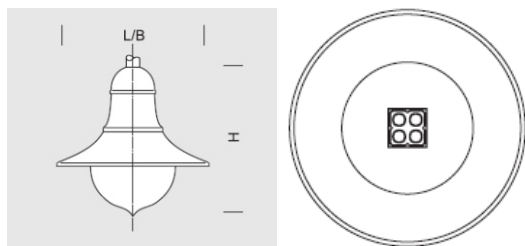

### OPTICS

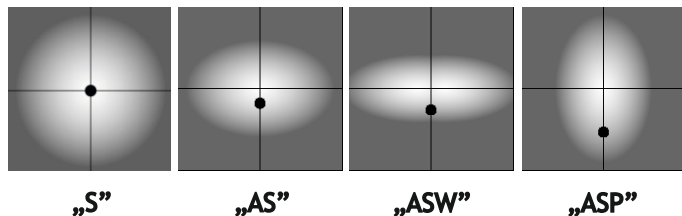

### DETAILED DESCRIPTION

INDEX	NAZWA NAME	DIMENSIONS [cm]	SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W	m <sup>2</sup>	kg
195-1111-000056	CHANTAL S 32	56/56/57	32	4900	154	36	4000	112	0,12	5,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



### PRODUCT DESCRIPTION

Classic fixture to be arm-mounted, 160 mm at a height of 5-7 m. Aluminum body forms a sealed chamber (closed with a plate) with a sealed LED module (with the lens) mounted from the lampshade's side and a heat-sink and power supply unit - from the inside. The chamber is connected to the upper rosette, which - apart from its decorative function, also serves as a mounting bracket. Lamp-shade made of polycarbonate (PC) or polymethacrylate (PMMA), transparent or 'frozen' texture.

### TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 32 W/36 W
Lifetime	70.000 h LB 80/20
Optics	<b>S</b> <b>AS</b> <b>ASP</b> <b>ASW</b>
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	<b>IP65</b>
Protection class	<b>I</b> <b>II</b> *
CE	Yes

\* choice

### MECHANICAL DATA

Foundation	-
Column/body material	Aluminium
Lampshade	PMMA
Metal color	<div> <div></div> <div>White 9003</div> </div> <div> <div></div> <div>Grey 7043</div> </div> <div> <div></div> <div>Graphite 7016</div> </div> <div> <div></div> <div>Black 9005</div> </div> <div> <div></div> <div><b>RAL*</b></div> </div>

### ON ORDER



\*\* on special order