




## Street Lantern ELEW 6/2+1



### OPTICS

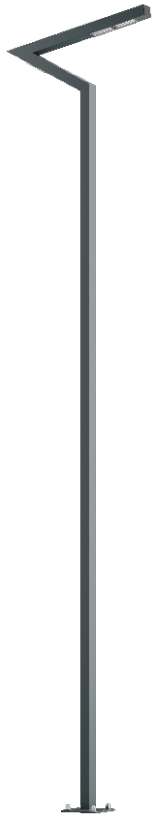

„S”

„AS”

„ASW”

„ASP”

### DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h <sub>1</sub> /h <sub>2</sub>	w/S	W	lm	lm / W	W	lm	lm / W	
190-1111-620028	ELEW LU 6/2+1	600/570/550	120/10x8	72	11100	154	90	10500	117	FBK-120/22

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



### PRODUCT DESCRIPTION

Modern lantern made of rectangular aluminum profiles. A unique form provides a distinctive architectural element. In the boom a modular LED luminaire with excellent optical parameters and modeled characteristics of a street luminaire. The lenses used give a diffuse reflection effect reducing glare. UV-resistant polycarbonate diffuser.

HEIGHT: 6 m

### TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 90 W/10500 lm
Lifetime	70.000 h LB 80/20
Optics	<b>S</b> <b>AS</b> <b>ASP</b> <b>ASW</b>
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	<b>IP65</b>
Protection class	<b>I</b> <b>II</b> *
CE	Yes

\* choice

### MECHANICAL DATA

Foundation	FBK-120/22
Column/body material	Aluminium
Lampshade	PMMA
Metal color	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> White 9003  <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px; margin-top: 5px;"></div> Grey 7043  <div style="width: 20px; height: 20px; background-color: #404040; margin-right: 5px; margin-top: 5px;"></div> Graphite 7016  <div style="width: 20px; height: 20px; background-color: #202020; margin-right: 5px; margin-top: 5px;"></div> Black 9005  <div style="margin-left: 10px; border: 1px solid black; padding: 2px;">RAL*</div> </div>

### ON ORDER



\*\* on special order