



## Fixture GEDANIA 48







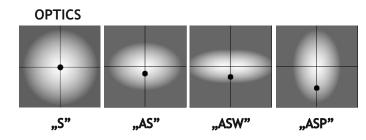

## **PRODUCT DESCRIPTION**

Universal classic fixture for mounting directly at posts ( $\check{r}60$  mm) or in armsystems at a height of 3-5 m. Aluminum body forms a sealed chamber (closed with a plate) with a sealed LED module (with the lens) from the outside. The chamber is seated on profiles connected to its lower rosette, which also serves as a mounting for the fixture on a post. Lamp-shade made of polycarbonate being resistant to UV radiation.

## **TECHNICAL SPECIFICATIONS**

Voltage	230 V					
Source power / fixture	Recommended: Integrated 48 W/60 W					
Lifetime	70.000 h LB 80/20					
Optics	S AS ASP ASW					
Ambient temperature	-30 +35					
Light color	4000 3000 *					
Ingress Protection	IP65					
Protection class						
CE	Yes					
*choice						
MECHANICAL DATA						
Foundation	-					
Foundation Column/body material	- Aluminium					
	- Aluminium PMMA					
Column/body material						
Column/body material Lampshade						
Column/body material Lampshade	РММА					
Column/body material Lampshade	PMMA Grey 7043					
Column/body material Lampshade	PMMA Grey 7043 Graphite 7016					

C 🕁

 $\bigcirc$ 

10kV

\*\*on special order

5000°K

DIM

2700°K | 300 mA

1050 mA

## DETAILED DESCRIPTION

	INDEX	NAZWA	DIMENSIONS [cm]	SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT
	INDEA	NAME	L/B/H	W	Im	lm / W	W	lm	lm / W	m²	kg
	195-1111-000029	GEDANIA 48	35/35/70	48	7400	154	60	5500	92	0,11	5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.