




Garden Lamp KALUX 1,2

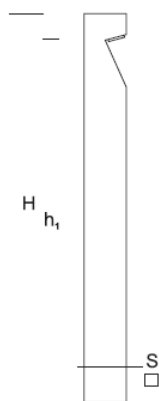

PRODUCT DESCRIPTION

Square aluminum column with a characteristic oblique undercut allows to fix LED light source at an angle that allows to illuminate paths or create other accents in the area.

Designed for: illumination of parks, areas around buildings, pedestrian and bicycle paths, gardens and public spaces.
HEIGHT: 1,2 m

TECHNICAL SPECIFICATIONS


| | |
|------------------------|---|
| Voltage | 230 V |
| Source power / fixture | Recommended: Integrated 8,5 W/1050 lm |
| Lifetime | 70.000 h LB 80/20 |
| Ambient temperature | -30 ÷ +45 |
| Light color | <input type="checkbox"/> 4000 <input type="checkbox"/> 3000 * |
| Ingress Protection | IP65 |
| Protection class | <input type="checkbox"/> I <input type="checkbox"/> II * |
| CE | Yes |

* choice

MECHANICAL DATA

| | |
|----------------------|--|
| Foundation | FBO-50/7,5 |
| Column/body material | Aluminium |
| Lampshade | - |
| Metal color | <input type="checkbox"/> White 9003 <input type="checkbox"/> Grey 7043 <input type="checkbox"/> Graphite 7016 <input type="checkbox"/> Black 9005 <input type="checkbox"/> RAL* |

ON ORDER



** on special order

DETAILED DESCRIPTION

| INDEX | NAZWA NAME | WYMIARY / DIMENSIONS (cm) | | ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT | | | OPRAWA / FIXTURE | | | FUNDAMENT FOUNDATION |
|-----------------|--------------|---------------------------|-------|-----------------------------------|------|--------|------------------|------|--------|----------------------|
| | | H/h ₁ | S | W | lm | lm / W | W | lm | lm / W | |
| 172-0024-000196 | KALUX LO 1,2 | 120/113/- | 12x12 | 6,5 | 1240 | 190 | 8,5 | 1050 | 124 | FBO-50/7,5 |

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.