



Fixture OTTAWA 48

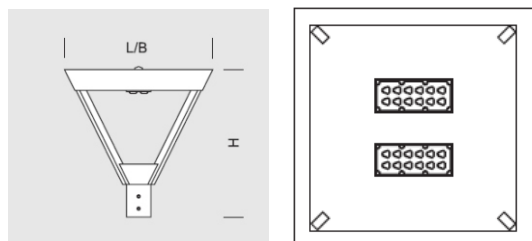

OPTICS

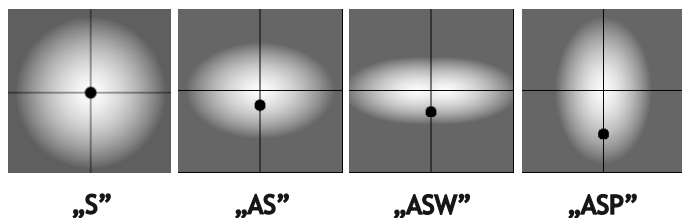

DETAILED DESCRIPTION

INDEX	NAME	DIMENSIONS [cm]	SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W	m ²	kg
195-1111-000099	OTTAWA 48	47/47/45	48	7400	154	60	6180	103	0,14	6,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

Universal, modern fixture in inverted pyramid shape. Aluminum body is a sealed equipment chamber, to which sealed LED modules with appropriate optics are fixed. The chamber with cover is seated on four profiles connected to lower rosette, which serves as a mounting for the fixture on a post

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 48 W/60 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	-
Column/body material	Aluminium
Lampshade	-
Metal color	<div> <div></div> <div>White 9003</div> </div> <div> <div></div> <div>Grey 7043</div> </div> <div> <div></div> <div>Graphite 7016</div> </div> <div> <div></div> <div>Black 9005</div> </div> <div> <div></div> <div>RAL*</div> </div>

ON ORDER



** on special order