




Park Lantern URBIN 5/2

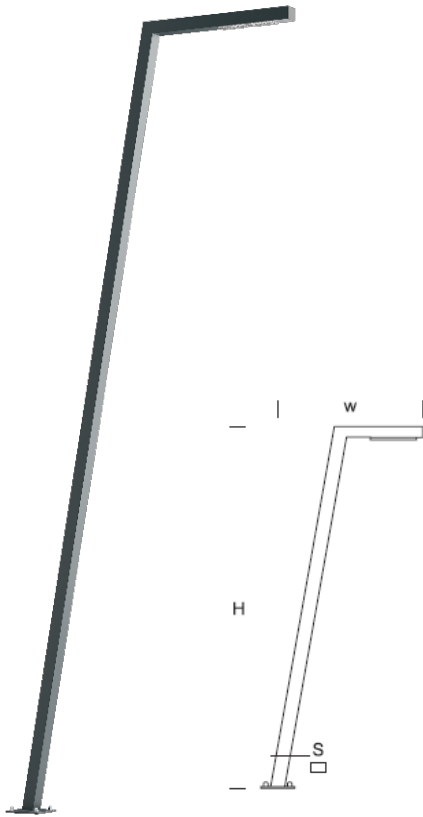

PRODUCT DESCRIPTION

Modern lantern made of rectangular aluminum profiles. Inclined form fits well with the architecture.

Model in four versions: Urbin, Urbin K, Urbin D, Urbin B equipped in proper fixture with required power, colour and optics.

HEIGHT: 5 m

TECHNICAL SPECIFICATIONS


| | |
|------------------------|--|
| Voltage | 230 V |
| Source power / fixture | Recommended: Integrated 60 W/7000 lm |
| Lifetime | 70.000 h LB 80/20 |
| Optics | S AS ASP ASW |
| Ambient temperature | -30 ÷ +45 |
| Light color | 4000 3000 * |
| Ingress Protection | IP65 |
| Protection class | I II * |
| CE | Yes |

* choice

MECHANICAL DATA


| | | | | | | | | | | | |
|----------------------|---|--|------------|--|-----------|--|---------------|--|------------|-------------|--|
| Foundation | FBK-90/18 | | | | | | | | | | |
| Column/body material | Aluminium | | | | | | | | | | |
| Lampshade | PMMA | | | | | | | | | | |
| Metal color | <table border="0"> <tr> <td></td> <td>White 9003</td> </tr> <tr> <td></td> <td>Grey 7043</td> </tr> <tr> <td></td> <td>Graphite 7016</td> </tr> <tr> <td></td> <td>Black 9005</td> </tr> <tr> <td colspan="2" style="text-align: center;">RAL*</td> </tr> </table> | | White 9003 | | Grey 7043 | | Graphite 7016 | | Black 9005 | RAL* | |
| | White 9003 | | | | | | | | | | |
| | Grey 7043 | | | | | | | | | | |
| | Graphite 7016 | | | | | | | | | | |
| | Black 9005 | | | | | | | | | | |
| RAL* | | | | | | | | | | | |

ON ORDER



** on special order

OPTICS

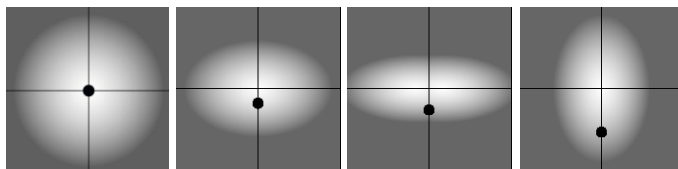

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

| INDEX | NAZWA NAME | WYMIARY / DIMENSIONS (cm) | | ŹRÓDŁO ŚWIATŁA / SOURCE OF LIGHT | | | OPRAWA / FIXTURE | | | FUNDAMENT FOUNDATION |
|-----------------|--------------|----------------------------------|----------|----------------------------------|------|--------|------------------|------|--------|----------------------|
| | | H/h ₁ /h ₂ | w/S | W | lm | lm / W | W | lm | lm / W | |
| 190-1111-520014 | URBIN LP 5/2 | 500/490 | 183/10x8 | 48 | 7400 | 154 | 60 | 7000 | 117 | FBK-90/18 |

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.