



## Street Lantern URBIN 6/2



### PRODUCT DESCRIPTION

Modern lantern made of rectangular aluminum profiles. Inclined form fits well with the architecture.

Model in four versions: Urbin, Urbin K, Urbin D, Urbin B equipped in proper fixture with required power, colour and optics.

HEIGHT: 6 m

### TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 60 W/7000 lm
Lifetime	70.000 h LB 80/20
Optics	<b>S</b> <b>AS</b> <b>ASP</b> <b>ASW</b>
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	<b>IP65</b>
Protection class	<b>I</b> <b>II</b> *
CE	Yes

\* choice

### MECHANICAL DATA


Foundation	FBK-120/22										
Column/body material	Aluminium										
Lampshade	PMMA										
Metal color	<table border="0"> <tr> <td></td> <td>White 9003</td> </tr> <tr> <td></td> <td>Grey 7043</td> </tr> <tr> <td></td> <td>Graphite 7016</td> </tr> <tr> <td></td> <td>Black 9005</td> </tr> <tr> <td colspan="2" style="text-align: center;"><b>RAL*</b></td> </tr> </table>		White 9003		Grey 7043		Graphite 7016		Black 9005	<b>RAL*</b>	
	White 9003										
	Grey 7043										
	Graphite 7016										
	Black 9005										
<b>RAL*</b>											

### ON ORDER



\*\* on special order

### OPTICS

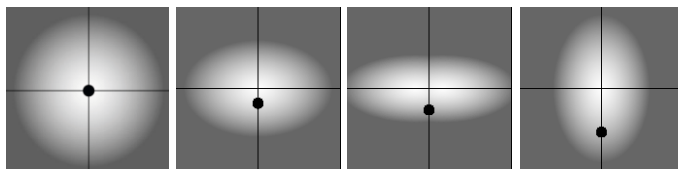

„S”

„AS”

„ASW”

„ASP”

### DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h <sub>1</sub> /h <sub>2</sub>	w/S	W	lm	lm / W	W	lm	lm / W	
190-1111-620014	URBIN LP 6/2	600/590	207/10x8	48	7400	154	60	7000	117	FBK-120/22

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.