


Garden Lamp WAY 2,0

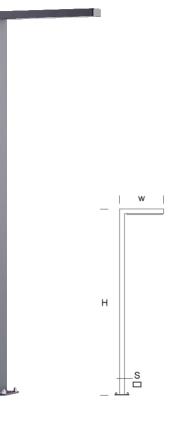

 IP
 CLASS
 C €
 I
 ENERGY
 IK
 4000°K
 CRI

 65
 I/II
 C €
 I/II
 D
 08
 3000°K
 ≥80

PRODUCT DESCRIPTION


Modern garden lamp constructed of rectangular aluminum profiles. Rectangular SMD LED panel with asymmetrical characteristics built into the boom as a light source. The lampshade made of PMMA resistant to UV rays.

Designed for: illumination of public spaces with special requirements.

HEIGHT: 2,0 m

TECHNICAL SPECIFICATIONS

Voltage	230 V					
Source power / fixture	Recommended: Integrated 20 W/1710 lm					
Lifetime	70.000 h LB 80/20					
Optics	AS					
Ambient temperature	-30 ÷ +45					
Light color	4000 3000 *					
Ingress Protection	IP65					
Protection class	I II *					
CE	Yes					
*choice						
MECHANICAL DATA						
MECHANICAL DATA	FBK-50/16					
	FBK-50/16 Aluminium					
Foundation						
Foundation Column/body material	Aluminium					
Foundation Column/body material Lampshade	Aluminium PMMA					
Foundation Column/body material Lampshade	Aluminium PMMA White 9003					
Foundation Column/body material Lampshade	Aluminium PMMA White 9003 Grey 7043					
Foundation Column/body material Lampshade	Aluminium PMMA White 9003 Grey 7043 Graphite 7016					



"AS"

DETAILED DESCRIPTION

	NAZWA	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT
	NAME	H/h ₁ /h ₂	w/S	W	Im	lm / W	W	lm	lm / W	FOUNDATION
172-00000119	WAY LO 2,0	200	60/8x4	17	2800	155	20	1710	86	FBK-50/16

DIM

2700°K

5000⁰K

** on special order

(☆

 \odot

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.