




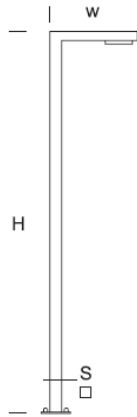

Street Lantern WAY 6/8 K

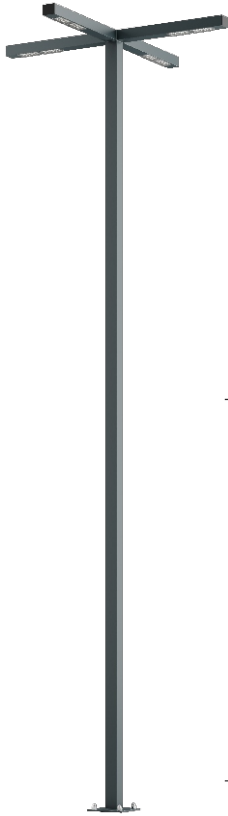

OPTICS

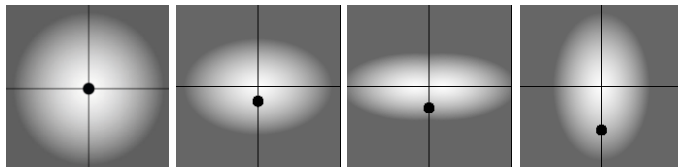

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		ŹRÓDŁO ŚWIATEŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h ₁ /h ₂	w/S	W	lm	lm / W	W	lm	lm / W	
190-1111-310010	WAY LU 6/8 K	600/590	100/10x10	192	29600	154	240	28000	117	FBK-120/22

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

The structure is made of aluminum profiles. LED modules with modeled characteristics mounted in the arm booms. Shade: UV resistant polycarbonate.

Designed for: illumination of public spaces with special requirements.

HEIGHT: 6 m


TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 240 W/28000 lm
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes


* choice

MECHANICAL DATA

Foundation	FBK-120/22
Column/body material	Aluminium
Lampshade	PMMA
Metal color	



ON ORDER



** on special order