





Street Lantern WAY 7/8 K

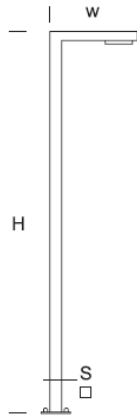

OPTICS

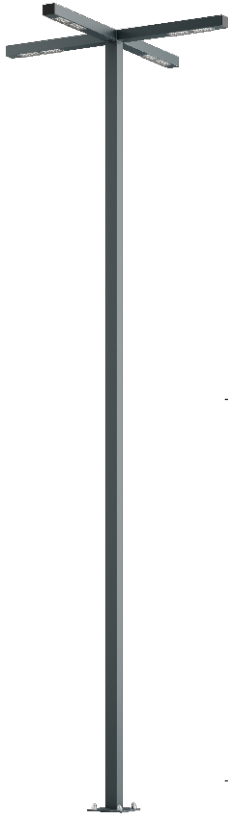

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

| INDEX | NAZWA NAME | WYMIARY / DIMENSIONS (cm) | | ŹRÓDŁO ŚWIATŁA / SOURCE OF LIGHT | | | OPRAWA / FIXTURE | | | FUNDAMENT FOUNDATION |
|-----------------|--------------|----------------------------------|-----------|----------------------------------|-------|--------|------------------|-------|--------|----------------------|
| | | H/h ₁ /h ₂ | w/S | W | lm | lm / W | W | lm | lm / W | |
| 190-1111-310010 | WAY LU 7/8 K | 700/690 | 100/15x12 | 192 | 29600 | 154 | 240 | 28000 | 117 | FBK-150/22 |

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

The structure is made of aluminum profiles. LED modules with modeled characteristics mounted in the arm booms. Shade: UV resistant polycarbonate.

Designed for: illumination of public spaces with special requirements.

HEIGHT: 7 m


TECHNICAL SPECIFICATIONS

| | |
|------------------------|--|
| Voltage | 230 V |
| Source power / fixture | Recommended: Integrated 240 W/28000 lm |
| Lifetime | 70.000 h LB 80/20 |
| Optics | S AS ASP ASW |
| Ambient temperature | -30 ÷ +45 |
| Light color | 4000 3000 * |
| Ingress Protection | IP65 |
| Protection class | I II * |
| CE | Yes |

* choice

MECHANICAL DATA

| | |
|----------------------|------------|
| Foundation | FBK-150/22 |
| Column/body material | Aluminium |
| Lampshade | PMMA |
| Metal color | |




Grey 7043

Graphite 7016

Black 9005

ON ORDER



** on special order