ELMARCO Technika Świetlna Sp. z o.o. Sp. K.
Ul. Krzemowa 7, 81-577 Gdynia,
tel. (58) 552 84 27

Street Lantern **WAY 7/8 K**

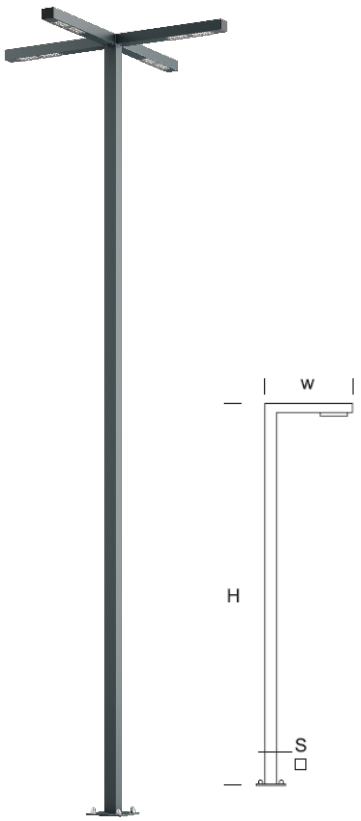

IP 65 | CLASS I/II | CE | ENERGY D | IK 08 | 4000°K 3000°K | CRI ≥80

PRODUCT DESCRIPTION

The structure is made of aluminum profiles. LED modules with modeled characteristics mounted in the arm booms. Shade: UV resistant polycarbonate.

Designed for: illumination of public spaces with special requirements.

HEIGHT: 7 m

TECHNICAL SPECIFICATIONS

Voltage	230 V
Source power / fixture	Recommended: Integrated 240 W/28000 lm
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

*choice

MECHANICAL DATA

Foundation	FBK-120/22
Column/body material	Aluminium
Lampshade	PMMA
Metal color	

Grey 7043
Graphite 7016
Black 9005
RAL*

OPTICS

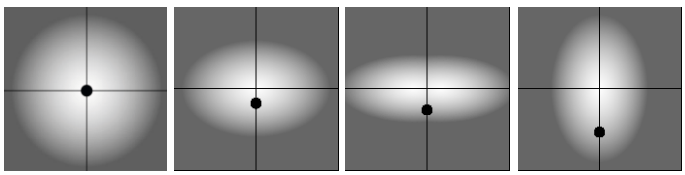

„S" „AS" „ASW" „ASP"

ON ORDER

DIM | 2700°K – 5000°K | 200 mA – 1050 mA | 10kV

**on special order

DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY /DIMENSIONS (cm)		ŹRÓDŁO ŚWIATŁA / SOURCE OF LIGHT			OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		$H/h_1/h_2$	w/S	W	lm	lm / W	W	lm	lm / W	
190-1111-310010	**WAY LU 7/8 K**	700/690	100/15x10	192	29600	154	240	28000	117	FBK-120/22

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.