




Garden Lamp BOLUX D 1,2

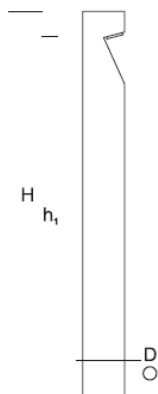

PRODUCT DESCRIPTION

A cylindrical aluminium column with wooden elements and a characteristic diagonal undercut allows the LED light source to be fixed at an angle to illuminate paths or create other accents in gardens or public spaces.

HEIGHT: 1,2 m

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 8,5 W/1000 lm
Lifetime	70.000 h LB 80/20
Ambient temperature	-30 ÷ +45
Light color	<input type="checkbox"/> 4000 <input type="checkbox"/> 3000 *
Ingress Protection	IP65
Protection class	<input type="checkbox"/> I <input type="checkbox"/> II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	FBK-60/12,5
Column/body material	Aluminium/wood
Lampshade	-
Metal color	<input type="checkbox"/> White 9003 <input type="checkbox"/> Grey 7043 <input type="checkbox"/> Graphite 7016 <input type="checkbox"/> Black 9005 <input checked="" type="checkbox"/> RAL*
Wood color	<input type="checkbox"/> Light wood <input type="checkbox"/> Dark wood

ON ORDER



** on special order

DETAILED DESCRIPTION

INDEX	NAZWA NAME	WYMIARY / DIMENSIONS (cm)		OPRAWA / FIXTURE			FUNDAMENT FOUNDATION
		H/h ₁	D	W	lm	lm / W	
172-0001-000004	BOLUX D LO 1,2	120/110	13	8,5	1000	124	FBK-60/12,5

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.