




## Garden Lamp KALUX D 1,6

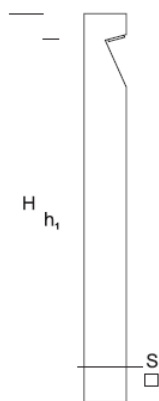

### PRODUCT DESCRIPTION

The square aluminium column with wooden elements and a distinctive diagonal undercut allows the LED light source to be fixed at an angle to illuminate pathways or create other accents in the area.

HEIGHT: 1,6 m

### TECHNICAL SPECIFICATIONS


|                        |                                       |
|------------------------|---------------------------------------|
| Voltage                | 230 V                                 |
| Source power / fixture | Recommended: Integrated 8,5 W/1000 lm |
| Lifetime               | 70.000 h LB 80/20                     |
| Ambient temperature    | -30 ÷ +45                             |
| Light color            | 4000 3000 *                           |
| Ingress Protection     | IP65                                  |
| Protection class       | I II *                                |
| CE                     | Yes                                   |

\*choice

### MECHANICAL DATA

|                      |   |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
|----------------------|---|--|------------|--|-----------|--|---------------|--|------------|-------------|--|--|------------|--|-----------|
| Foundation           | FBK-50/14,5   |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
| Column/body material | Aluminium/wood  |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
| Lampshade            | -   |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
| Metal color          | <table border="0"> <tr><td></td><td>White 9003</td></tr> <tr><td></td><td>Grey 7043</td></tr> <tr><td></td><td>Graphite 7016</td></tr> <tr><td></td><td>Black 9005</td></tr> <tr><td><b>RAL*</b></td><td></td></tr> <tr><td></td><td>Light wood</td></tr> <tr><td></td><td>Dark wood</td></tr> </table> |  | White 9003 |  | Grey 7043 |  | Graphite 7016 |  | Black 9005 | <b>RAL*</b> |  |  | Light wood |  | Dark wood |
|                      | White 9003  |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
|                      | Grey 7043   |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
|                      | Graphite 7016   |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
|                      | Black 9005  |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
| <b>RAL*</b>          |   |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
|                      | Light wood  |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
|                      | Dark wood   |  |            |  |           |  |               |  |            |             |  |  |            |  |           |
| Wood color           | Light wood<br>Dark wood   |  |            |  |           |  |               |  |            |             |  |  |            |  |           |

### ON ORDER



\*\* on special order

### DETAILED DESCRIPTION

| INDEX           | NAZWA NAME     | WYMIARY / DIMENSIONS (cm) |       | OPRAWA / FIXTURE |      |        | FUNDAMENT FOUNDATION |
|-----------------|----------------|---------------------------|-------|------------------|------|--------|----------------------|
|                 |                | H/h <sub>1</sub>          | S     | W                | lm   | lm / W |                      |
| 172-0001-000007 | KALUX D LO 1,6 | 160/150/-                 | 12x12 | 8,5              | 1000 | 124    | FBK-50/14,5          |

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.