





ELMARCO
GOOD FORM FOR LIGHTING

ELMARCO Technika Świetlna Sp. z o.o. Sp. K.
Ul. Krzemowa 7, 81-577 Gdynia,
tel. (58) 552 84 27

Fixture BELL M 32

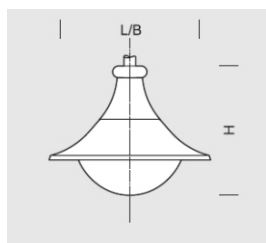

OPTICS

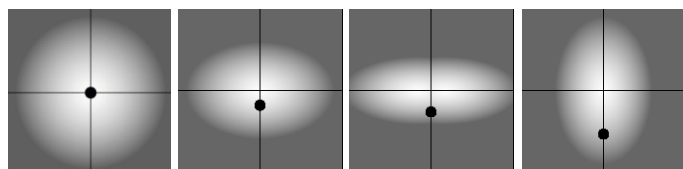

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAME	DIMENSIONS [cm]	LIGHT SOURCE			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W	m ²	kg
195-1111-000078	BELL M 32	56/56/44	32	5020	157	36	3600	100	0,12	6

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

Classic fixture adapted to be mounted on a boom (ř60 mm) at a height of 4-7 m. Aluminum body forms a sealed chamber (closed with a plate) with a sealed LED module (with the lens) mounted from the lamp-shade's side and a heat-sink and power supply unit - from the inside. The chamber is connected to the upper rosette, which - apart from its decorative function, also serves as a mounting bracket. Lamp-shade made of polycarbonate being resistant to UV radiation. Light source: LED panel with a system of lenses and reflector forming any required shape of light.

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 32 W/36 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient Temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress protection	IP66
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	-
Column/body material	Aluminium
Lampshade	PMMA
Metal color	<div> <div></div> <div>White 9003</div> </div> <div> <div></div> <div>Grey 7043</div> </div> <div> <div></div> <div>Graphite 7016</div> </div> <div> <div></div> <div>Black 9005</div> </div> <div> <div></div> <div>RAL*</div> </div>

ON ORDER



** on special order