




Fixture WEGA III 96 SMART



OPTICS

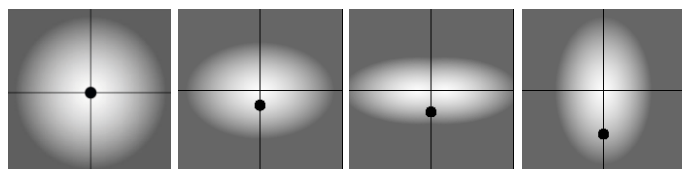

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAME	DIMENSIONS [cm]	SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W	m ²	kg
195-1111-000111	WEGA III 96 SMART	54/22/7,5	96	13920	145	104	12500	120	0,05	7

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

Double-chamber LED fixture adapted to be mounted on a boom or directly at a post, at a height of 6-8 m. An angle of lighting (0°, 5°, 10° vertically and horizontally) can be adjusted.

Body made of a pressured aluminium cast forms a convection radiator. Lampshade made of tempered glass. Light source: LED panel with a system of lenses and reflector forming the required shape of light.

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 96 W/104 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP66
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	-
Column/body material	Aluminium
Lampshade	-
Metal color	White 9003 Grey 7043 Graphite 7016 Black 9005 RAL*

ON ORDER



** on special order