





Fixture OTTAWA 32

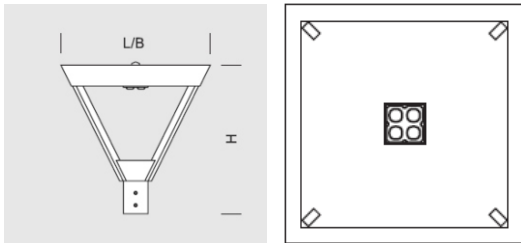

OPTICS

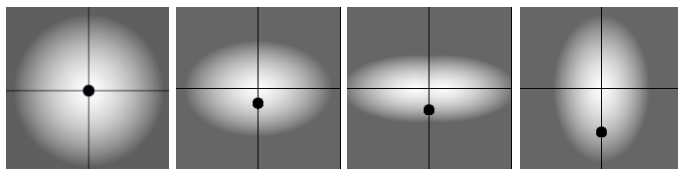

„S”

„AS”

„ASW”

„ASP”

DETAILED DESCRIPTION

INDEX	NAME	DIMENSIONS [cm]	SOURCE OF LIGHT			FIXTURE			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W	m ²	kg
195-1111-000098	OTTAWA 32	47/47/45	32	4900	154	36	3600	103	0,14	6

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



PRODUCT DESCRIPTION

Universal, modern fixture in inverted pyramid shape. Aluminum body is a sealed equipment chamber, to which sealed LED modules with appropriate optics are fixed. The chamber with cover is seated on four profiles connected to lower rosette, which serves as a mounting for the fixture on a post

TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 32 W/36 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP65
Protection class	I II *
CE	Yes

* choice

MECHANICAL DATA

Foundation	-
Column/body material	Aluminium
Lampshade	-
Metal color	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 20px; background-color: #f0f0f0; margin-right: 5px;"></div> White 9003 <div style="width: 20px; height: 20px; background-color: #808080; margin-right: 5px; margin-top: 5px;"></div> Grey 7043 <div style="width: 20px; height: 20px; background-color: #404040; margin-right: 5px; margin-top: 5px;"></div> Graphite 7016 <div style="width: 20px; height: 20px; background-color: #202020; margin-right: 5px; margin-top: 5px;"></div> Black 9005 <div style="margin-left: 10px; border: 1px solid black; padding: 2px;">RAL*</div> </div>

ON ORDER



** on special order