





## Fixture ARIA 48

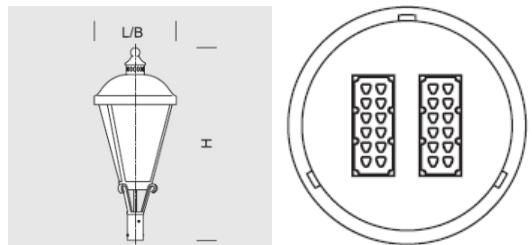

### OPTICS

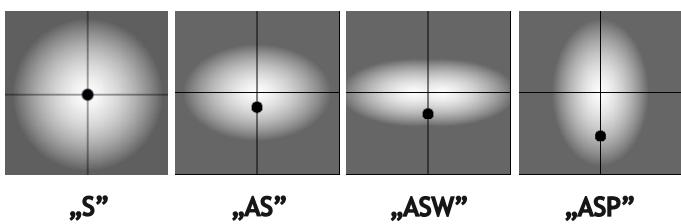

### DETAILED DESCRIPTION

INDEX	NAME	DIMENSIONS [cm]	LIGHT SOURCE			Fixture			WIND	WEIGHT
		L/B/H	W	lm	lm / W	W	lm	lm / W		
195-1111-000006	ARIA 48	38/38/70	48	8784	183	60	6600	110	0,10	4

Data for: Ra > 80, 4000K, 700mA. Source of light and integrated control gear, replacement only by the manufacturer's service.



### PRODUCT DESCRIPTION

Classic fixture adapted for mounting directly at a post with 60mm diameter or in arm-system - Aria, Aria Bis at a height of 3-4 m, Aria Plus at a height of 5-6m. Aluminum body forms a sealed chamber for fittings closed with a plate and a sealed tight LED module (with the lens) attached to it at the lampshade's side. The chamber is seated on shaped profiles connected to its lower rosette, which serves as a mounting for the fixture on a post.

### TECHNICAL SPECIFICATIONS


Voltage	230 V
Source power / fixture	Recommended: Integrated 48 W/60 W
Lifetime	70.000 h LB 80/20
Optics	S AS ASP ASW
Ambient temperature	-30 ÷ +45
Light color	4000 3000 *
Ingress Protection	IP66
Protection class	I II *
CE	Tak

\*choice

### MECHANICAL DATA

Foundation	-
Fixture material	Aluminium
Lampshade	PMMA
Metal color	   RAL*

### ON ORDER



\*\* on special order

